


Jacuzzi J-LX

Specifications

Seating Capacity	6-7
Dimensions	91" x 91" x 34" (231 cm x 231 cm x 86 cm); For complete dimensions, see page 86
Dry Weight	855 lbs (388 kg)
Filled Weight (Spa Volume)	4,525 (2,052 kg)
Filled Weight (Average Fill)	3,607 lbs (1,636 kg)
Water Capacity (Spa Volume)	440 US gallons (1,666 Liters)
Water Capacity (Average Fill)	330 US gallons (1,249 Liters)
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz):2-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz):1-Speed, 2.0 HP continuous
Circulation Pump	Yes, 8-hour
Total PowerPro® Jets	41 (plus 2 IR Light Therapy)
Seat A Jets	2 PowerPro® NX2, 2 PowerPro® RX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX
Seat B Jets	2 PowerPro® FX Large Rotational, 2 PowerPro® MX, 2 PowerPro® FX
Seat C Jets	4 PowerPro® RX
Seat D Jets	2 PowerPro® NX2, 9 PowerPro® FX, 2 IR Light Therapy
Seat E Jets	3 PowerPro® FX
Seat F Jets	2 PowerPro® NX2, 2 PowerPro® RX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX
Seat G Jets	2 PowerPro® NX2
Massage Selector	1
Air Controls	4, On/Off rocker switch air controller
Water Management System	One ProClarity® 40 ft ² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft filter; Floating Weir; Factory installed CLEARARRAY Active Oxygen™ Clean Water System Export (50 Hz):Factory installed CLEARARRAY Active Oxygen™ Clean Water System
LED Lighting	Two underwater light with 4 color modes, waterfall lights, exterior corner lights
Cabinet	Modern Hardwood, Brushed Gray, Smoked Ebony
Acrylic Colors	Platinum, Porcelain
Headrests	4
Waterfalls	One; Independent flow rate (on or off) adjustment powered by pump 1
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@1x32A, 1x20A/1x16A, or 1x16A/1x16A/1x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights
Audio System (Optional)	N/A

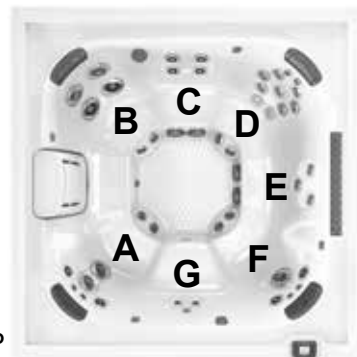


*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-LX

Operation/Seat Depths

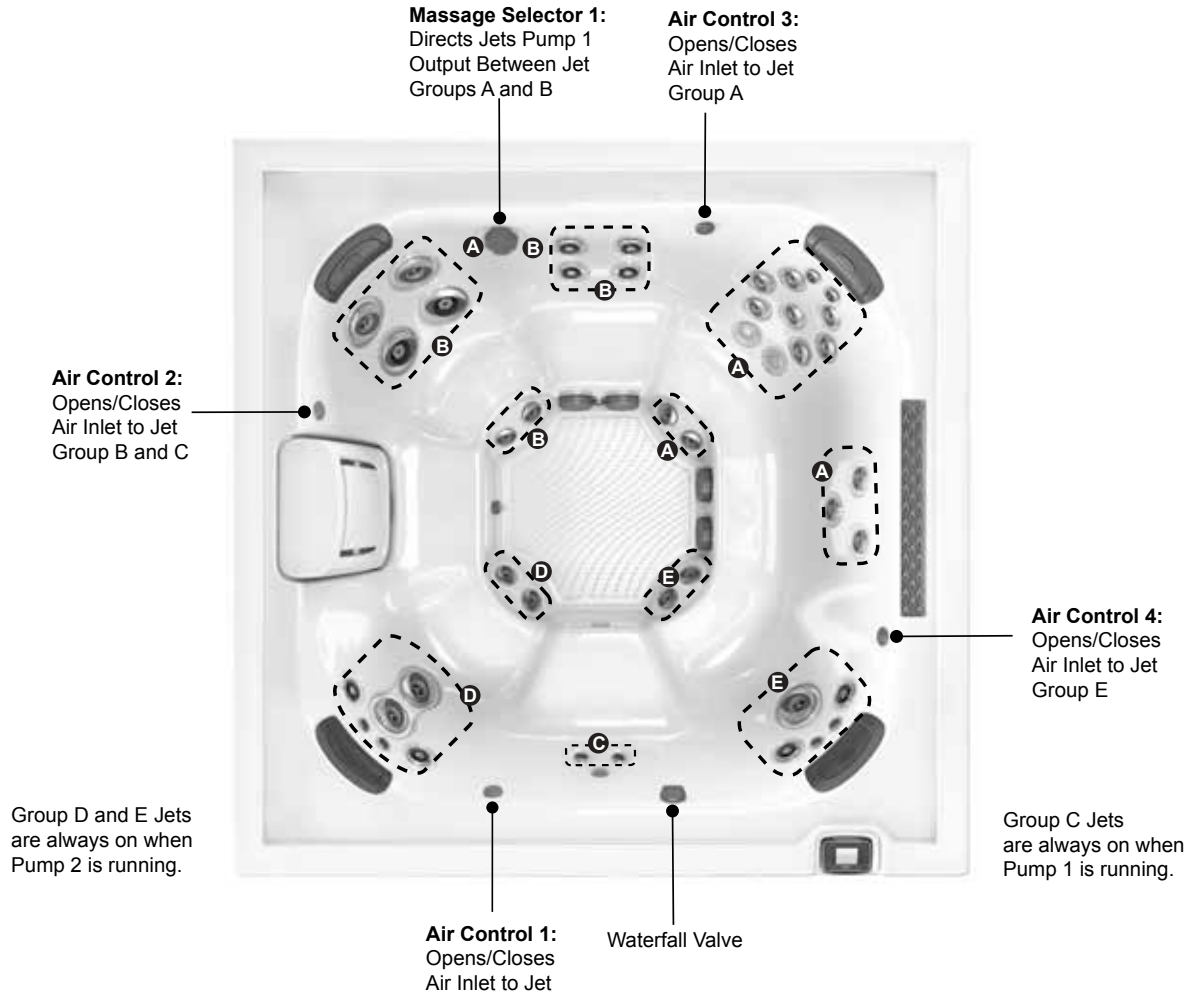

41 Total Jets (plus 2 IR Light Therapy)



Spa Operation Subject to Change without Notice

Seat Depths

A = 24.25" (61.60 cm)
B = 21.13" (53.66 cm)
C = 26.13" (66.36 cm)
D = 20.50" (52.07 cm)
E = 26.81" (68.10 cm)

F = 25.00" (63.50 cm)
G = 26.31" (66.83 cm)
H = 18.00" (45.72 cm)
I = 31.00" (78.74 cm)

Listed dimensions represent distance from top of the deck to lowest point in seat.
 Tolerance $\pm 0.5"$ (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice


Jacuzzi J-LX

Dimensions


TOP VIEW

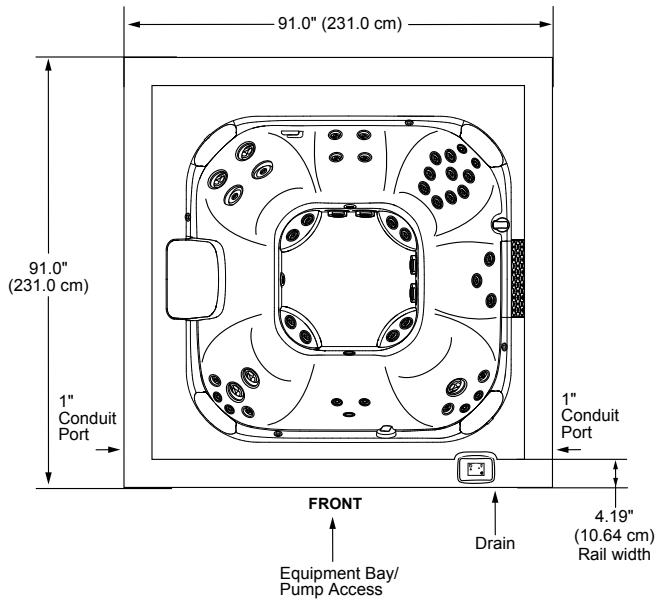


FRONT/BACK SIDE VIEW

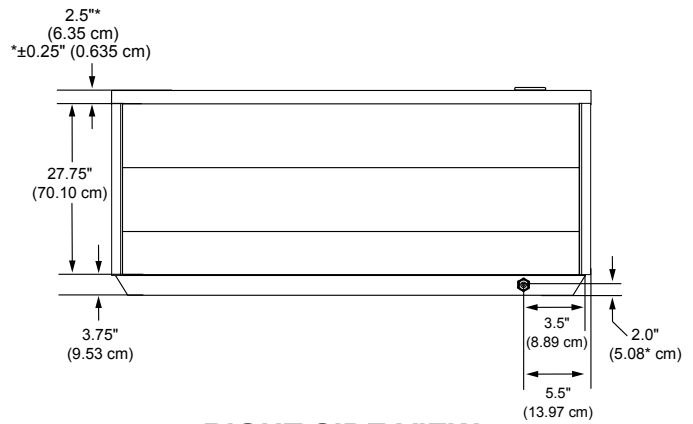

RIGHT SIDE VIEW

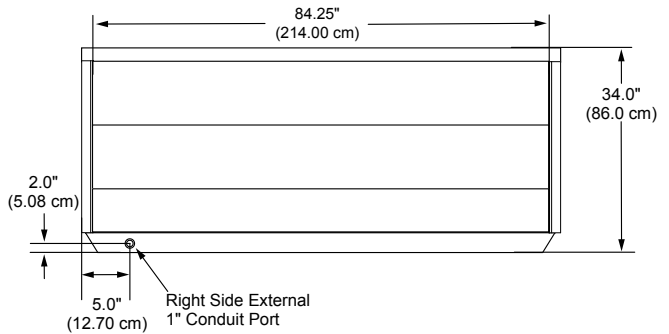

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

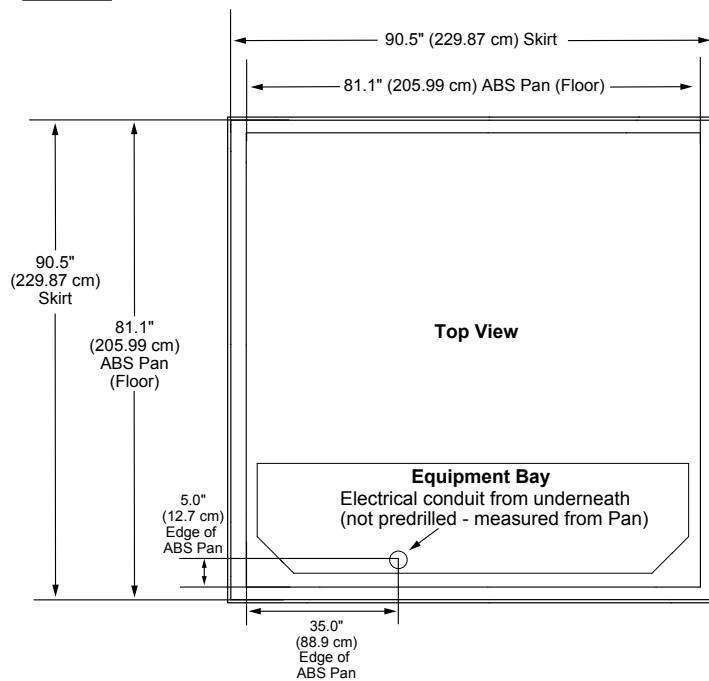

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)